


EVOLine®

the e-place design



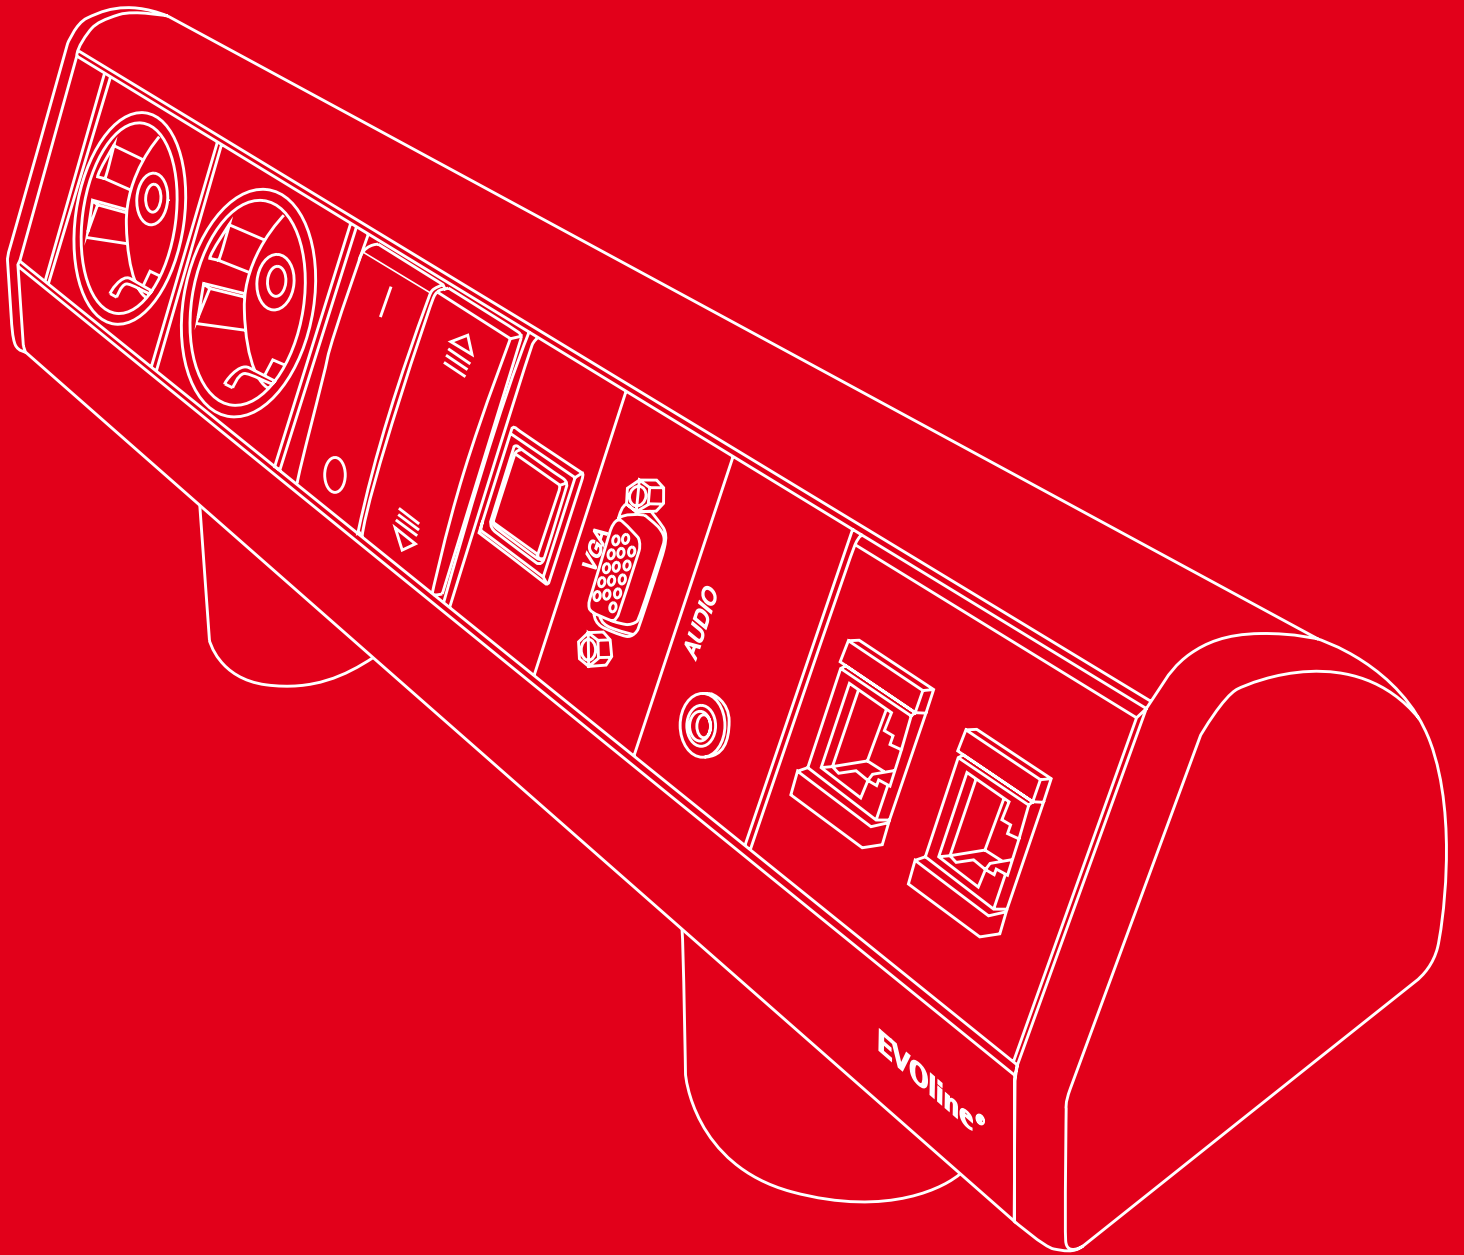


EVOline® Dock




Supply EVOLine® Dock

Examples of supply modules
for circuit 1 and 2
(IT circuit Red)


Through the end cap LEFT
and / or end cap
RIGHT, and out through the
bottom of the profile.




Connection
in through the
bottom of the
profile.




End cap to
individually
use with cable
and end splices.



End cap with cable
and plug.
Variants available.



End cap with two
cables
and plugs.
Variants available.




End cap with cable
and connectors.


EVOLine® Dock

The principle


Desks become „e-places“.
 Dock directly.
 Design for touching.
 Modules as needed.
 Patented mounting clamps.
 Creating two out of one.
 Outlet for plug and cable.
 No dust by electrostatics.




End cap with GST18/3 plug power input




End cap with GST18/3 plug and plug, two circuits



End cap with GST18/3 plug and socket, power input/output



End cap with Wago Winsta/3 plug power input



End cap with Wago Winsta/3 plug power input/output

Surface variations



Silver



Chrome



Black



ALANOX®

ALANOX® - Stainless Steel finish. Aluminium appears in the familiar gleam of Stainless Steel! That special something, combined with a special colouring of the anodised layer, gives the profiles that appropriate Stainless Steel finish and prevents visible fingerprints.

EVOLine® Dock individual

Just choose the modules and the configuration!
 With the modular design of EVOLine® Dock you have the opportunity to customise your model the way you wish.

How to order 124-125



Socket modules

Page 200 - 219



Data modules

Page 222 - 239



Multimedia modules

Page 240 - 255



Pushbutton and switch modules

Page 256 - 261



Protection modules

Page 261 - 265

1

**Selection
EVOLine® Dock
profile**
Page 129



Empty profile EVOLine® Dock Silver

Order number:
9330 1810 0000

2

**Selection
EVOLine®
modules**
Page 201 - 271



2 x Sockets
VDE

Order number:
9330 0090 0000




Kinetics
Transmission
Modules

Order number:
9330 6410 0000




Push button,
single

Order number:
9330 6120 0000




VGA Modules

Order number:
9330 0810 0000



Audio Modules

Order number:
9330 0910 0000



2 x Data
Modules
CAT 6

Order number:
9330 7860 0000

3

**Selection
EVOLine®
supply cable**
Page 220 - 221



Supply cable

Order number:
9330 2020 0000

Please commu-
nicate your cable
preference.
Please specify

All cable lengths are measured from the connection point and mounting position of the modules in the profile.

Please note for module selection:

the profile number determines the permissible combination of modules and profiles.

EVOLine® Profile type No.

EVOLine® Dock **1**

EVOLine® U-Dock **2**

EVOLine® Port **3**

EVOLine® Port Lounge **4**

EVOLine® Vertical **5**

EVOLine® SubDesk **6**

EVOLine® Caddy **7**

EVOLine® FlipTop **8**

EVOLine® V-Dock **9**

4

Your
EVoline® Dock
Individual



5

Selection
EVoline®
Accessories
Page 130 - 131



2 x
Mounting
clamps

Order number:
1599 0902 0500

Further
EVoline®
Accessories
Page 281 - 287



EVoline®
Cable-
Management
to protect
your cable
distribution



Page 272- 279

Ordering information:

After receiving your order a product drawing will be sent to you, that you release with your signature, thus avoiding wrong orders.

Our general conditions of sale apply for all orders.
www.schulte.com

Subject to technical changes.

The goods are not marked with EAN-codes.
If required, please order separately.

Article	Picture	Specification	Type
EVOLine® Dock DESK Aluminium housing free positioning with slide stops three sockets, 0°, 16 A, with contact protection Germany, Austria 2) supply cable 3,0 m Cable routing: for power (also for places where electricity has been used) through the left end cap		Silver anodised**	1593 0004 0300
		Black anodised**	1593 0004 0100
EVOLine® Dock DESK DATA Aluminium housing free positioning slide stops three sockets, 0°, 16 A, with contact protection Germany, Austria 2) supply cable 3,0 m two modular couplings for patch cable Wired RJ 45 to RJ 45, 1:1, CAT6 shielded Cable routing: for electricity through the left end cap		Silver anodised**	1593 0047 8300
		Black anodised**	1593 0047 8100
EVOLine® Dock SMALL Aluminium housing three sockets, 0°, 16 A, with contact protection Germany, Austria 2) supply cable 3,0 m Cable routing: for electricity bottom left of the profile		one mounting clamp for tabletops with 8 - 40 mm thickness	
		Silver anodised **	1593 0066 6300
		Black anodised **	1593 0066 6100
		without mounting clamp	
		Silver anodised **	1593 0003 9300
		Black anodised **	1593 0003 9100
EVOLine® Dock DATA SMALL Aluminium housing three sockets, 0°, 16 A, with contact protection Germany, Austria 2) supply cable 3,0 m two modular couplings for patch cable Wired RJ45 to RJ45, 1:1, CAT6 shielded Cable routing: for electricity bottom left of the profile		two mounting clamps for tabletops with 8 - 40 mm thickness	
		Silver anodised **	1593 0066 2300
		Black anodised **	1593 0066 2100
		without mounting clamp	
		Silver anodised **	1593 0047 7300
		Black anodised **	1593 0047 7100
EVOLine® Dock ECONOMY Aluminium housing One unswitched socket ON / OFF switch Blue illuminated four switched sockets 0°, 16 A, with contact protection Germany, Austria 2) supply cable 3.0 m cable: for power bottom left of the profile		two mounting clamps for tabletops with 8 - 40 mm thickness	
		Silver anodised **	1593 0066 3300
		Black anodised **	1593 0066 3100
		without mounting clamp	
		Silver anodised **	1593 0000 1300
		Black anodised **	1593 0000 1100

** Stock, short-term availability




2) Appropriate socket types for international requirements can be found on page 203

EVOLine® Dock / T-Dock

Article	Picture	Specification	Type
EVOLine® Dock ECONOMY DATA Aluminium housing, one unswitched socket, ON / OFF switch, Blue illuminated, four switched sockets 0 °, 16 A, with contact protection Germany, Austria 2) supply cable 3.0 m cable: for power bottom left of the profile, two modular couplings for patch cable RJ45 to RJ45, 1:1 interconnected CAT6 shielded cable: for power from the lower left of profile		two mounting clamps for tabletops with 8 - 40 mm thickness Silver anodised **	1593 0066 4300
		Black anodised **	1593 0066 4100
		without mounting clamp Silver anodised **	1593 0029 8300
		Black anodised **	1593 0029 8100
EVOLine® Dock MULTIMEDIA Aluminium housing, three sockets, 0 °, 16 A, with contact protection Germany, Austria 2) supply cable 3,0 m two modular couplings for patch cable Wired RJ 45 to RJ 45, 1:1, CAT6 shielded, VGA 15-pin. HDD connector, audio jack 3.5 mm, USB 2.0 Type A connector, each 3,0 m cable with connector cable: for power on the left below the profile cable management: data and multimedia, right below the profile		two mounting clamps for tabletops with 8 - 40 mm thickness Silver anodised **	1593 0213 3300
		Black anodised **	1593 0213 3100
		without mounting clamp Silver anodised **	1593 0213 2300
		Black anodised **	1593 0213 2100
EVOLine® T-Dock Aluminium housing for mounting on counter tops up to 40 mm thickness, two sockets, 0°, 16 A, with contact protection Germany, Austria 2) supply cable 2,5 m plug supplied loose Cable routing: for power through the Stainless Steel base		Stainless Steel-coloured anodised ** ALANOX® Black caps	1593 0220 5600
		EVOLine® T-Dock Aluminium housing for mounting on counter tops up to 40 mm thickness, two sockets, 0°, 16 A, with contact protection Germany, Austria 2) supply cable 2,5 m plug supplied loose Cable routing: for power through the Stainless Steel base	Stainless Steel-coloured anodised ** ALANOX® Stainless Steel end caps lacquered ALANOX®

** Stock, short-term availability

2) Appropriate socket types for international requirements can be found on page 203

Article	Picture	Specification	Type
<p>EVoline® Dock USB Aluminium housing a mounting clamp for table tops with 8-40 mm thickness. Data module with a 4-port USB 2.0 HUB active, four USB inputs , an output with an USB cable and connector type A with 3,0 m USB 2.0 cable. Cable management: data and multimedia, Out through the right underside of the profile.</p>		<p>Silver anodised**</p> <p>Black anodised**</p>	<p>1593 0297 1300</p> <p>1593 0297 1100</p>
<p>EVoline® Dock USB Aluminium housing a mounting clamp for table tops from 8 to 40 mm thickness. With data module 2 x 4-port USB 2.0 HUB active four USB inputs , an output with an USB cable and connector type A with 3,0 m USB 2.0 cable. Cable management: data and multimedia, Out through the bottom right profile side.</p>		<p>Silver anodised**</p> <p>Black anodised**</p>	<p>1593 0297 3300</p> <p>1593 0297 3100</p>
<p>EVoline® Dock USB Aluminium housing a mounting base made of Stainless Steel for table tops. up to 50 mm thickness. Building height 40 mm. Mounting hole Ø 16,5 mm. Data module with 4-port USB 2.0 HUB active four USB connections, an output with an USB cable and connector type A with 3,0 m USB 2.0 cable. Cable management: data and multimedia, Out through the bottom right profile side</p>		<p>Silver anodised**</p> <p>Black anodised**</p>	<p>1593 0297 5300</p> <p>1593 0297 5100</p>
<p>EVoline® Dock USB Aluminium housing, Stainless Steel mounting base for table tops up to 50 mm thickness Building height 40 mm Mounting hole Ø 16,5 mm Data module with 2 x 4-port USB 2.0 HUB active eight USB connections, two outputs with an USB cable and connector type A with 3.0 m connection cable USB 2.0 cable Cable management: data and multimedia, Out through the bottom right profile side</p>		<p>Silver anodised**</p> <p>Black anodised**</p>	<p>1593 0297 6300</p> <p>1593 0297 6100</p>

Additional technical information
to USB modules can be found on
Page 150 - 151






** Stock, short-term availability

EVOLine® Dock Individual




Article	Picture	Specification	Type
<p>Just combine the modules in the basic profile of your choice! Thanks to the modular design of the EVOLine® Dock, you have the opportunity to customize individual models according to your wishes. For EVOLine® Docks in Chrome that have been plated, only one profile length, 350 mm is allowed (For example, six modules height = 50 mm). The total length of these EVOLine® Docks is limited to 350 mm.</p> <p>For more information about „How to order EVOLine®“ See pages 124-125</p>			
<p>Empty profile EVOLine® Dock Black*** Aluminium housing Black anodised, The supply cables depends on the power supply requirement</p>			9330 1811 0000
<p>Empty profile EVOLine® Dock Silver*** Aluminium housing anodised, The supply cables depends on the power supply requirement</p>			9330 1810 0000
<p>Empty profile EVOLine® Dock STAINLESS STEEL*** steel-coloured anodised Aluminium housing ALANOX®, The supply cables depends on the power supply requirement</p>			9330 8450 0000
<p>Empty profile EVOLine® Dock CHROME*** Chromed Aluminium housing The supply cables depends on the power supply requirement</p>		Minimum order quantity 20 pieces	9330 8500 0000

*** available on demand, please ask for delivery times

2) Appropriate socket types for international requirements can be found on page 203

Article	Picture	Specification	Type
<p>Mounting clamp twist-proof, pre-assembled kit</p> <p>Black</p> <p>Fits profile: 1,2,9</p>		<p>Range 8 to 40 mm</p> <p>Range 40 to 75 mm</p>	<p>1599 0902 1200</p> <p>1599 0902 1300</p>
<p>Two mounting clamps twist-proof, pre-assembled kit</p> <p>Black</p> <p>Fits profile: 1,2,9</p>		<p>Range 8 to 40 mm</p> <p>Range 40 to 75 mm</p>	<p>1599 0902 0500</p> <p>1599 0902 1000</p>
<p>Mounting clamp with add-on bracket for a second EVOLine® Dock twist-proof, pre-assembled kit</p> <p>Black</p> <p>Fits profile: 1,2,9</p>		<p>Range 8 to 40 mm</p> <p>Range 40 to 75 mm</p>	<p>1599 0902 3500</p> <p>1599 0902 3600</p>
<p>Two mounting clamps with add-on bracket for a second EVOLine® Dock twist-proof, pre-assembled kit</p> <p>Black</p> <p>Fits profile: 1,2,9</p>		<p>Range 8 to 40 mm</p> <p>Range 40 to 75 mm</p>	<p>1599 0902 3700</p> <p>1599 0902 3800</p>
<p>Add-on bracket for a second EVOLine® Dock</p> <p>Black</p> <p>Fits profile: 1,2,9</p>			1599 0902 1700

EVOLine® Dock Accessories

Article	Picture	Specification	Type
Mounting Set for table-mounting consisting of: two Dock carriers and two metal screws incl. wingnuts			1599 0903 8200
Mounting Set for cabinet mounting two Dock carriers and two wood screws			1599 0903 8300
Mounting pillar high-quality anti-theft protection EVOLine® Profiles for countertops with max. 50 mm thickness Material: Stainless Steel consisting of: shim, 16 mm stud, nuts, washers Fits profile: 1,2,9			1599 0906 0700

Schulte Elektrotechnik
GmbH & Co. KG

Postfach 2732/2708
D-58477 Lüdenscheid

Jüngerstraße 21
D-58515 Lüdenscheid

Telefon +49 (0) 23 51 / 94 81-0
Telefax +49 (0) 23 51 / 4 26 58
E-mail info@schulte.com

www.schulte.com



www.schulte.com

6040 0510 1000